



Agilent N9310A RF Signal Generator

9 kHz to 3.0 GHz

Data Sheet

Definitions and Conditions

The signal generator will meet its specifications when:

- It is within its calibration cycle
- It has been turned on at least 45 minutes
- It has been stored at an ambient temperature within the allowed operating range for at least two hours before being turned on; if it had previously been stored at a temperature range inside the allowed storage range, but outside the allowed operating range

“**Specifications**” describe the performance of parameters covered by the product warranty and apply to the full temperature range of 5 to 45 °C, unless otherwise noted.

“**Typical**” values describe additional product performance information that is not covered by the product warranty. It is performance beyond specifications that 80 percent of the units exhibit with a 95 percent confidence level over the temperature range 20 to 30 °C. Typical performance does not include measurement uncertainty.

“**Nominal**” values indicate expected performance, or describe product performance that is useful in the application of the product, but are not covered by the product warranty.



Agilent Technologies


Specifications

		Supplemental information	
Frequency			
Range	9 kHz to 3.0 GHz		
Resolution	0.1 Hz		
Switching speed	< 10 ms	Within 0.1 ppm of final frequency	
Frequency reference			
	Option PFR	Standard	
Aging rate	$\pm 1 \times 10^{-7}$ /year $\pm 1.5 \times 10^{-7}$ /2 years	$\pm 1 \times 10^{-6}$ / year	
Temperature stability	$\pm 1.5 \times 10^{-8}$ (20 to 30 °C) $\pm 5 \times 10^{-8}$ (5 to 50 °C)	$\pm 1 \times 10^{-6}$ (5 to 45 °C)	
Timebase reference output			
Frequency	10 MHz		
Amplitude	> 0.35 Vrms level into 50 Ω		
Connector	BNC female		
External reference input			
Range	2 MHz, 5 MHz, 10 MHz		
Amplitude	0.5 to 2 Vrms		
Connector and impedance	50 Ω ; BNC female		
Output			
Power	-127 to +13 dBm	+20 dBm settable	
Resolution	0.1 dB		
Accuracy	< ± 1 dB	$F_c \geq 100$ kHz, $-120 \leq \text{Level} \leq +13$ dBm, 20 to 30 °C	
Switching speed	< 10 ms	< 0.3 dB deviation	
VSWR (typical)	< 1.6 < 1.8	1.5 MHz $\leq F_c \leq 2.5$ GHz 2.5 GHz $\leq F_c \leq 3$ GHz	
Output connector and impedance	N-type; 50 Ω nominal		
Reversal power protection			
DC voltage	30 V		
RF power	+36 dBm	1 minute; the warning for reversed power protection is nominally at +25 dBm	
Spectral purity			
SSB phase noise	< -95 dBc/Hz	Typical, $F_c = 1$ GHz at 20 kHz offset	
Residual FM	< 30 Hz rms; < 90 Hz peak < 20 Hz rms	CW mode, $F_c = 1$ GHz; BW = 0.3 to 3 kHz Res FM optimized mode	
Harmonics	< -30 dBc	Level ≤ 0 dBm, $F_c \geq 1$ MHz	
Non-harmonics	< -50 dBc	Level ≤ 0 dBm, ≥ 10 kHz from carrier	


Specifications (continued)

Supplemental information

Characteristic SSB phase noise

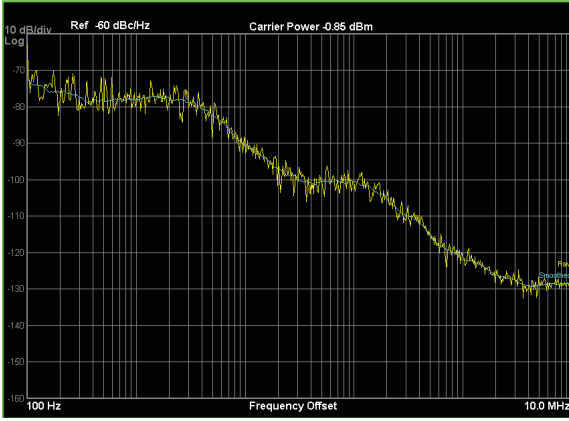

fc = 1,000 MHz

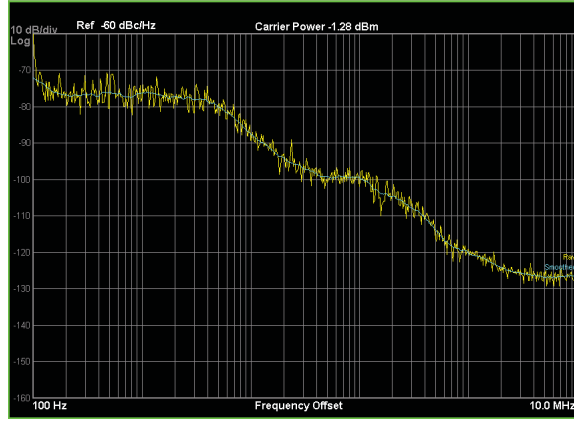

fc = 2,000 MHz

Sweep modes RF and LF

LF sweep range	20 Hz to 80 kHz
RF sweep range	9 kHz to 3 GHz
Sweep points	2 to 1,001
Dwell time	10 ms to 1 s

Amplitude

Sweep range	-127 to +13 dBm
Sweep points	2 to 1,001
Dwell time	10 ms to 1 s

Simultaneous modulation ¹

		AM		I/Q	FM		ØM	Pulse	
		Internal	External		Internal	External		Internal	External
AM	Internal	–	•	–	•	•	•	–	–
	External	•	–	–	•	•	•	–	–
I/Q		–	–	–	•	•	•	•	•
FM	Internal	•	•	•	–	•	–	•	•
	External	•	•	•	–	–	–	•	•
ØM		•	•	•	–	–	–	•	•
Pulse	Internal	–	–	•	•	•	•	–	–
	External	–	–	•	•	•	•	–	–

1. The N9310A has one external modulation input connector. The simultaneous external modulations are applied to the same input signal.

Specifications (continued)

		Supplemental information
Amplitude modulation ($F_c \geq 100$ kHz)		
Operating modes	Internal, external AC	
Range	0 to 100%	Envelope peak < maximum specified power
Resolution	0.1%	
Rates	20 Hz to 20 kHz	
Accuracy	< \pm (5% of setting +0.2%)	1 kHz, 0 dBm and 80% modulation, 0.3 to 3 kHz bandwidth
Distortion	< 2%	1 kHz, 0 dBm and 80% modulation, 0.5 to 15 kHz bandwidth
External input	MOD IN connector	
Sensitivity	0.5 V _{peak}	Input voltage for 100% modulation depth
Input impedance	BNC; > 100 k Ω	Nominal
Frequency modulation ($F_c \geq 100$ kHz)		
Operating modes	Internal, external AC	
Frequency deviation	20 Hz to 100 kHz	
Resolution	< 1%	Minimum 1 Hz
Rates	20 Hz to 80 kHz	
Distortion	1%	1 kHz rate, 0.3 to 3 kHz bandwidth, deviation = 50 kHz
Deviation accuracy	< \pm (5% of FM deviation +300 Hz)	1 kHz, 0 dBm and 50 kHz deviation, 0.3 to 3 kHz bandwidth
Carrier frequency deviation	< 200 Hz	Relative to carrier; external mode
External input	MOD IN connector	
Sensitivity	0.5 V _{peak}	Input voltage for 100 kHz modulation deviation
Input impedance	BNC; > 100 k Ω	Nominal
Phase modulation ($F_c \geq 100$ kHz)		
Operating modes	Internal	
Phase deviation	0 to 10 rad	Rate \leq 10 kHz
	0 to 5 rad	10 kHz < rate \leq 20 kHz
Resolution	< 1%	
Rates	300 Hz to 20 kHz	
Deviation accuracy	< \pm (5% of FM deviation +0.2 rad)	1 kHz rate, 0.3 to 3 kHz bandwidth
Distortion	< 1.5%	1 kHz rate, 0.3 to 3 kHz bandwidth, deviation = 5 rad
Input impedance	BNC; > 100 k Ω	Nominal
Pulse modulation		
Operating modes	Internal, external	
On/Off ratio	\geq 40 dB	
Rise/Fall time	< 3 μ s	
Pulse width	100 μ s to 1 s	Internal, external
Pulse period	200 μ s to 2 s	Internal
Time resolution	1 μ s	
Input connector and voltage level	BNC female; TTL	

Specifications (continued)

Supplemental information		
Internal modulation source	Provides a modulation signal for AM, FM, phase modulation, and LF out	
Waveform	Sine	
Frequency range	20 Hz to 80 kHz	
Resolution	0.1 Hz	
Accuracy	0.005%	Typical
LF out (Internal modulation source)		
Amplitude	0 to 3 V _{peak}	Level to high impedance
Output voltage resolution	< 1%	1 mV minimum resolution
Frequency response	< ± 0.2 dB	20 Hz to 20 kHz
Total harmonic distortion	< 0.1%	Typical; 20 Hz to 20 kHz, 30 kHz low pass filter
Connector and impedance	BNC female; < 1Ω	Front panel
Precision frequency reference (option PFR)		
Output frequency	10 MHz	
Accuracy	± [(time since last adjustment × aging rate) + temperature stability+ calibration accuracy ²⁾] ³	
Temperature Stability		
20 to 30 °C	±1.5 × 10 ⁻⁸	
5 to 50 °C	±5 × 10 ⁻⁸	
Aging		
1 year	±1 × 10 ⁻⁷	
2 years	±1.5 × 10 ⁻⁷	
Achievable Initial Calibration Accuracy	±4 × 10 ⁻⁸	
Output level	> +4 dBm	
Connector	BNC female, 50 Ω nominal, rear panel	
Calibration connection	Mini USB port, real panel	
I/Q modulation (Option 001 only)		
Operating mode	External I/Q inputs	
VSWR	< 1.5	
Full scale input	I ² + Q ² = 0.5 V _{rms}	
Modulation frequency range	DC to 40 MHz	At 3 dB points
Carrier suppression	40 dBc	Typical; modulation frequency = 10 kHz
QPSK EVM	3%	Typical; 1 Msps; 0.22 RRC filter
GMSK phase error	1.2 °rms	Typical; 1 Msps; BT = 0.5
Connector and impedance	BNC female; 50 Ω	Rear panel

2. Calibration accuracy depends on how accurately the frequency standard was adjusted to 10 MHz. If the adjustment procedure is followed, the calibration accuracy is given by the specification of the achievable initial calibration accuracy.

3. The specification applies after the generator has been powered on for four hours.

Specifications (continued)

		Supplemental information
USB connector		
USB host interface	3 x A plug	V 1.1 protocol
USB device interface	1 x B plug	V 1.1 protocol
General		
Power requirement	100 to 240 Vac; 50 to 60 Hz	Auto-ranging
Power consumption	65 W	
Temperature range	5 to 45 °C	Operating
	-20 to 70 °C	Storage
Weight	9.2 kg	Approximately
Dimensions	132.5 x 320 x 400 mm	H x W x D
Display		
Resolution	640 x 480	
Size	165.1 mm (6.5 in) diagonal (nominal)	
Data storage		
Internal	16 MB nominal	
External	Supports USB 2.0-compatible memory devices	
EMC		
Complies with European EMC Directive 2004/108/EC		
<ul style="list-style-type: none"> • IEC/EN 61326-1 or IEC/EN 61326-2-1 • CISPR Pub 11 group 1, class A • AS/NZS CISPR 11:2004 • ICES/NMB-001:2004 		
This ISM device complies with Canadian ICES-001		
Cet appareil ISM est conforme à la norme NMB-001 du Canada		
Safety		
Complies with European Low Voltage Directive 2006/95/EC		
<ul style="list-style-type: none"> • IEC/EN 61010-1 2nd Edition • Canada: CSA C22.2 No. 61010-1-04 • USA: UL 61010-1 2nd Edition 		
Audio noise		
Acoustic noise emission	Geraeuschemission	
LpA < 70 dB	LpA < 70 dB	
Operator position	Am Arbeitsplatz	
Normal position	Normaler Betrieb	
Per ISO 7779	Nach DIN 45635 t.19	
Environmental stress		
<p>Samples of this product have been type tested in accordance with the Agilent Environmental Test Manual and verified to be robust against the environmental stresses of storage, transportation, and end-use; those stresses include, but are not limited to, temperature, humidity, shock, vibration, altitude, and power line conditions. Test methods are aligned with IEC 60068-2 and levels are similar to MILPRF-28800F Class 3</p>		

 **Agilent Email Updates**

www.agilent.com/find/emailupdates
Get the latest information on the products and applications you select.

Agilent Channel Partners

www.agilent.com/find/channelpartners
Get the best of both worlds: Agilent's measurement expertise and product breadth, combined with channel partner convenience.

Agilent Education corner

www.agilent.com/find/edu

Your one-stop education resource for college and university engineering educators, researchers and students.

Agilent Product Registration

www.agilent.com/find/register

Register your instruments for service notifications, firmware update alerts, application notes and more. You have the Agilent edge. Register today and keep it sharp.



Agilent Advantage Services is committed to your success throughout your equipment's lifetime. To keep you competitive, we continually invest in tools and processes that speed up calibration and repair and reduce your cost of ownership. You can also use Infoline Web Services to manage equipment and services more effectively. By sharing our measurement and service expertise, we help you create the products that change our world.

www.agilent.com/find/advantageservices



www.agilent.com/quality

For more information on Agilent Technologies' products, applications or services, please contact your local Agilent office. The complete list is available at:

www.agilent.com/find/contactus

Americas

Canada	(877) 894 4414
Brazil	(11) 4197 3500
Mexico	01800 5064 800
United States	(800) 829 4444

Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 112 929
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Other AP Countries	(65) 375 8100

Europe & Middle East

Belgium	32 (0) 2 404 93 40
Denmark	45 45 80 12 15
Finland	358 (0) 10 855 2100
France	0825 010 700*
	*0.125 €/minute
Germany	49 (0) 7031 464 6333
Ireland	1890 924 204
Israel	972-3-9288-504/544
Italy	39 02 92 60 8484
Netherlands	31 (0) 20 547 2111
Spain	34 (91) 631 3300
Sweden	0200-88 22 55
United Kingdom	44 (0) 118 972 6201

For other unlisted countries:

www.agilent.com/find/contactus

Revised: December 14, 2011

Product specifications and descriptions in this document subject to change without notice.

© Agilent Technologies, Inc. 2011
Published in USA, December 22, 2011
5990-8116EN

